

CUBO GAS

4B SERIES




FEATURES

- Available with or without soundproof enclosure
- 2, 3, 4, or 5 stages
- Electric motor driven V-belt, direct coupled
- Suitable for CNG applications in range of 200 - 600 kW
- Touch screen power-control panel
- Air or water cooled

POWER	200 - 600 kW
INLET PRESSURE	1 - 100 bar
CAPACITY	600 - 9800 Sm ³ /h

AVAILABLE SKID MOUNTED OR INSIDE ENCLOSURE

SKID

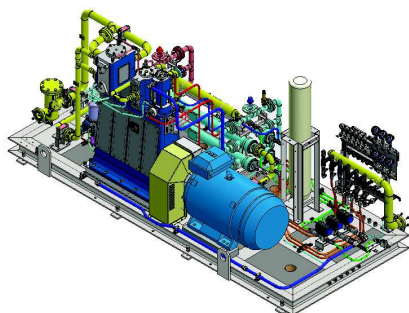

ENCLOSURE

